


APEM.

# Hartmann Codier GmbH & Co. KG



## Type PT65...

- Height: 6,5 mm
- Pin connection 3+3
- All standard codes
- Screwdriver and cross-shaped slot types
- Straight, crimped and angular pins

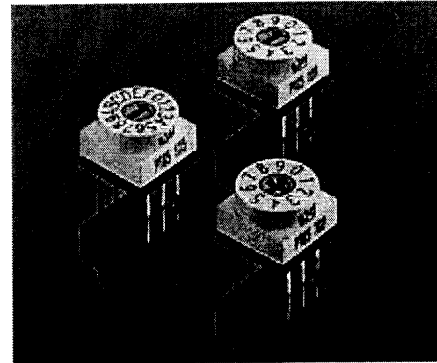

### Mechanical Data

Permiss. ambient temp.	-20°C - +70°C
Torque	min. 0,7 Ncm
Expected life	min. 10 <sup>4</sup> steps
Positions/U	10, 16

### Electrical Data

Operating voltage	24V
Contact load, static	0,4A
Contact load, dynamic	0,15A
Test voltage	250V 50Hz/1 min
Contact resistance	< 80 mOhm
Insulation resistance	> 100 MOhm

### Solder recommendation

(DIN IEC 68-2-20)

Solder iron	max. 2s/340°C
Solder bath	max. 10s/260°C


### Standard actuators

### Individual operating elements

### Pulse generator

### Codes

### Dimensions

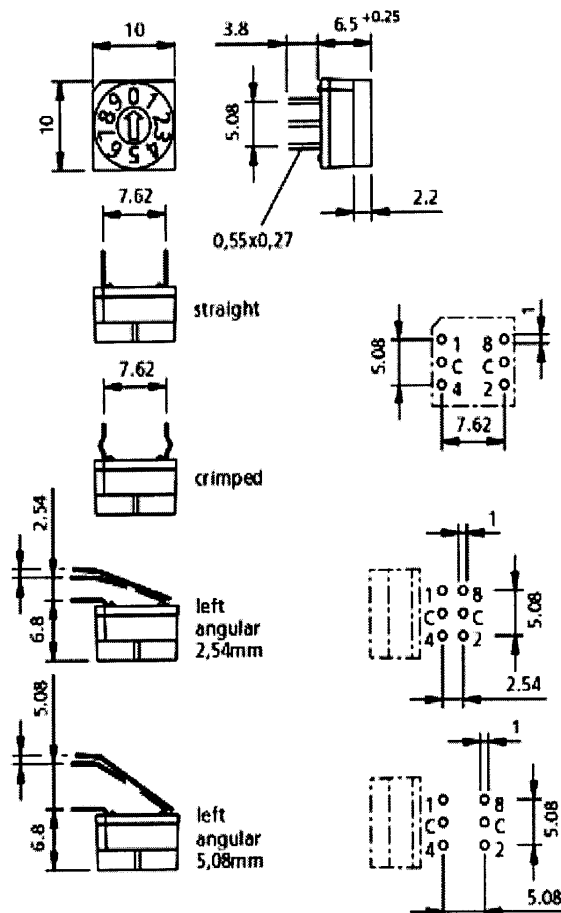

### Download drawings:

DXF-Format (AutoCAD)

## Order description

**PT65 1 01 L254**

Series	Standard actuators	Codes	Terminals
PT65	1 = arrow-shaped slot 3 = spindle 5 = segment wheel 7 = cross-shaped slot	01 = BCD 02 = BCD Compl. 03 = Hexadec. 05 = Graycode 06 = Hex. Compl.	V = crimped L254 = left angular 2,54 mm L508 = left angular 5,08 mm

---

 to  
 previous page

 sample request /  
 request for quotation
 

---

© Hartmann Codier GmbH & Co. KG  
 Industriestrasse 3  
 D-91083 Baiersdorf  
 Tel.: 0 91 33 / 77 93-0  
 Fax: 0 91 33 / 42 35